

BEST AVAILABLE COPY

PCT/EP200 4 / 0 0 5 5 0 4

PA 1146101

02 JUN 2004

THE UNITED STATES OF AMERICA

TO ALL TO WHOM THESE PRESENTS SHALL COME:

UNITED STATES DEPARTMENT OF COMMERCE

United States Patent and Trademark Office

BEST AVAILABLE COPY

March 25, 2004

THIS IS TO CERTIFY THAT ANNEXED HERETO IS A TRUE COPY FROM THE RECORDS OF THE UNITED STATES PATENT AND TRADEMARK OFFICE OF THOSE PAPERS OF THE BELOW IDENTIFIED PATENT APPLICATION THAT MET THE REQUIREMENTS TO BE GRANTED A FILING DATE UNDER 35 USC 111.


APPLICATION NUMBER: 60/462,005

FILING DATE: April 11, 2003

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

By Authority of the
COMMISSIONER OF PATENTS AND TRADEMARKS

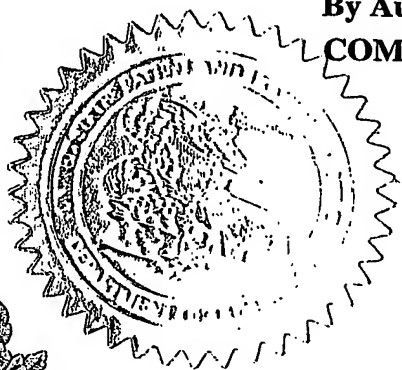

P. R. GRANT
Certifying Officer

60452005 04-11-03

PTO/SB/16 (6-95)
Approved for use through 04/11/98. OMB 0651-0037
Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

PROVISIONAL APPLICATION COVER SHEET

This is a request for filing a PROVISIONAL APPLICATION under 37 C.F.R. § 1.53(c)


Docket Number: 45051-00035USPL		Type a plus sign (+) inside this box →		+
INVENTOR(S)/APPLICANT(S)				
LAST NAME	FIRST NAME	MIDDLE INITIAL	RESIDENCE (CITY AND EITHER STATE OR FOREIGN COUNTRY)	
PALENIUS	Torgny		Svalörtvägen 10 SE- 246 50 Löddeköpinge, Sweden	
HOKFELT	Johan		Korsgatan 7 B SE- 223 53 Lund, Sweden	
ÖSTBERG	Christer		Björkvägen 8 SE- 254 44 Staffanstorps, Sweden	
TITLE OF THE INVENTION: Method and Apparatus for Measurement Event Synchronisation				
CORRESPONDENCE ADDRESS: Stanley R. Moore Jenkins & Gilchrist, P.C. 1445 Ross Avenue, Suite 3200 Dallas				
(STATE) TEXAS	(ZIP CODE) 75202-2799	(COUNTRY) USA		
ENCLOSED APPLICATION PARTS (check all that apply):				
<input checked="" type="checkbox"/> Specification	Number of Pages	15	<input type="checkbox"/> Small Entity Statement	
<input checked="" type="checkbox"/> Drawings	Number of Figures	7	<input type="checkbox"/> Other :	
<input checked="" type="checkbox"/> A check in the amount of \$160 is enclosed to cover the provisional application filing fees.			Filing Fees Due for Provisional Application:	
<input type="checkbox"/> The Commissioner is hereby authorized to charge or credit any over or under payments of filing fees to Deposit Account Number: 10-0447			<input checked="" type="checkbox"/> \$160.00	
			<input type="checkbox"/> \$80.00	

Was the invention made by an agency of the United States Government or under a contract with an agency of the United States government?

☒ No.

☐ Yes, and the name of the U.S. Government agency and the government contract number(s) are:

Respectfully submitted,



DATE

APRIL 11, 2003

NAME Stanley R. Moore

REGISTRATION NO.
(if appropriate)

26,958

☒ Additional inventors are being named on separately numbered sheets attached hereto.

PROVISIONAL APPLICATION FILING ONLY

Applicant(s) herein make claim to a new and useful process, machine, manufacture, or composition of matter, or any new and useful improvement thereof as substantially shown or described herein.

Jenkins & Gilchrist
A PROFESSIONAL CORPORATION

Provisional Patent Application Cover Sheet (cont.)

Additional Inventor Names/Address

Last Name	First Name	Middle Initial	RESIDENCE (CITY AND EITHER STATE OR FOREIGN COUNTRY)
WICHERT	Jan		Nationsgatan 5 SE- 224 60 Lund, Sweden
NILSSON	Mikael		Sommarlovsvägen 6 SE- 224 67 Lund, Sweden
EWALD	Richard		Lagerbringsväg 7 B SE- 224 60 Lund, Sweden
OLOFFSSON	Patrik		Holländarevägen 20 SE- 236 34 Höllviken, Sweden
PALM	Håkan		Flygelvägen 101 SE- 224 72 Lund, Sweden



11062 U.S. PTO

04-14-03 60462005 04-14-03 *Apr 14*



11062 U.S. PTO

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Inventor(s):

Torgny PALENIUS et al.

Title of Invention:

Method and Apparatus for Measurement
Event Synchronisation

Attorney Docket No.:

45051-00036USPL

Box Provisional Patent Application
Commissioner for Patents
Washington, D.C. 20231

CERTIFICATE OF MAILING BY EXPRESS MAIL

"EXPRESS MAIL" Mailing Label No.: EV226957284US
Date of Deposit: APRIL 11, 2003

I hereby certify that this paper, including the documents referred to therein, or fee is being deposited with the U.S. Postal Service "Express Mail Post Office to Addressee" service under 37 CFR § 1.10 on the date indicated above and is addressed to:

Box Provisional Patent Application
Commissioner for Patents
Washington, D.C. 20231

Type or Print Name: Carla Elkins

Signature *Carla Elkins*

Dear Madam or Sir:

TRANSMITTAL LETTER FOR A PROVISIONAL PATENT APPLICATION
UNDER 37 C.F.R. § 1.53(c)

- ☒ Transmitted herewith is a Provisional Patent Application under 37 C.F.R. § 1.53(c) as identified above.
- ☐ Transmitted herewith is an Assignment to TELEFONAKTIEBOLAGET LM ERICSSON (publ) along with Form PTO-1595 Assignment Recordation Sheet. Please return the recorded assignment to the undersigned.
- ☐ The assignment recording fee under 37 C.F.R. § 1.21(h) of \$40.00 is herewith enclosed.
- ☐ Applicant(s) claim(s) small entity status under 37 CFR 1.9 and 1.27.
- ☒ The filing fee for a Provisional Patent Application under 37 C.F.R. § 1.16(k) in the amount of \$160 is herewith enclosed.

☒ TOTAL FEE REQUIRED

\$ 160

- ☐ Please charge our Deposit Account No. 10-0447 in the amount of \$ _____.
This document is attached in duplicate.
- ☒ A check in the amount of \$160 is attached. Please charge any deficiency or credit any overpayment to Deposit Account No. 10-0447.
- ☒ The Commissioner is hereby authorized to charge any underpayment or credit any overpayment of the following fees which may be associated with this communication to Deposit Account No. 10-0447.
- ☒ Any additional provisional patent application processing fees or surcharges under 37 C.F.R. §§ 1.16 or 1.17.
- ☒ The Commissioner is hereby authorized to charge any underpayment or credit any overpayment of the following fees due during the entire pendency of this application to Deposit Account No. 10-0447.
- ☒ Any provisional patent application processing fees under 37 C.F.R. §§ 1.16-1.20.

Respectfully submitted,

Date:

April 11, 2003



Stanley R. Moore
Registration No. 26,958

JENKENS & GILCHRIST, P.C.
1445 Ross Avenue, Suite 3200
Dallas, Texas 75202-2799
Telephone: (214) 855-4713
Facsimile: (214) 855-4300



23932

PATENT TRADEMARK OFFICE

11/04/2003

11:28

STROM & GULLIKSSON → 0012148554300

15/04/03 15:03:23 NR.938 00

030410 JA \CURRENT\001011974 Ericsson\0118Q-Measurements_Event\214 2674-18Q-FINAL.doc
1

APPLICANT:

TELEFONAKTIEBOLAGET L M ERICSSON (publ)

TITLE:

METHOD AND APPARATUS FOR MEASUREMENT
EVENT SYNCHRONISATION

5

Field of the Invention

The present invention relates to a method and apparatus for measurement event synchronisation of a portable radio communication apparatus providing multiple radio access technologies, and more particularly to a method and apparatus for measurement event synchronisation of a portable radio communication apparatus, comprising multiple and operatively interconnected radio access technology devices.

15

Description of the Prior Art

A multiple RAT (Radio Access Technology) terminal is a kind of communication apparatus recently introduced, that comprises two or more radio access technology devices based on different access technologies. A more specific example of a multiple RAT terminal is a dual RAT terminal, that includes two radio access technology devices based on for example the GSM (Global System for Mobile Communication) and the WCDMA (Wide band Code Division Multiple Access) technologies. This new kind of communication apparatuses provide great flexibility for end users, to have only one terminal for usage in different countries and regions providing digital cellular system infrastructures based on different radio access technologies.

25

An additional dimension and further advantage for multiple RAT terminal users are achieved in single regions providing multiple digital cellular system infrastructures based on different radio access technologies. This multiple capability holds out the further advantage, that the most suitable radio access technology of the multiple RAT

35

11/04/2003

11:28

STROM & GULLIKSSON -> 0012148554300

1504-623025 NR. 538 000

030410 JA \CURRENT\Q81P\3214 Ericsson\PL100_Measurement_Event\1074-360-FINAL.doc
2

terminal can be selected for communication in each situation.

For mobility functionality, i.e the user of the terminal crosses cell borders, a multiple or dual RAT terminal needs to perform base station signal level and identification measurements on both systems, for example WCDMA and GSM systems. This is performed by inter-system measurements that consist at least partly of finding and determining the identity of base stations for the respective system. When connected to one system, the terminal has to support measurements on another system. One way of implementing a dual RAT terminal is to have two separate radio sets, one for each RAT device, that operate independent of each other. This solution has, however, drawbacks with respect to size, RF (Radio Frequency) performance, and interference between radio devices that are arranged or located close to each other.

It is however desirable to utilise parts of the radio resources, i.e components common for both technologies, at least for reduced power consumption and miniaturisation purposes. In this kind of dual RAT system the two different radio access technology units will work together in a quasi-parallel manner, wherein one of the units is active and the other one is non-active or passive. Measurements on the passive system cannot be carried out while the terminal is receiving/transmitting on the connected or active system. These measurements can be performed either when there are gaps in the reception/transmission of the connected system or in parallel with the reception of the connected system when only down-link gaps are required.

The inter-RAT measurements consist in part of finding and determining the identity of base stations. Each WCDMA base station can be identified in any measurement gap, provided that it has a minimum length, but independent on the specific placement of the gap in time. In contrast,

identification of a specific GSM base station can only take place during particular time slots, which make the particular timing of the measurement gap important. This fact implies that identification of GSM base stations requires some degree of planning, whereas WCDMA base station identification can be performed without knowing the exact timing of the measurement gap.

With or without common radio resources, there is a particular problem associated with a situation, where a dual RAT terminal is camping on a scheme belonging to a GSM network and where the terminal does not support WCDMA measurements to be performed while the GSM RAT device is either receiving or transmitting.

Moreover, it is difficult to schedule in advance how the GSM idle gaps should be distributed between the GSM RAT device and WCDMA RAT device, since the need for GSM measurement gaps is not predictable. Hence, it is not possible to inform the WCDMA RAT device in advance of when the WCDMA measurement gaps will occur.

From a complexity point of view, it is preferred not to plan the measurements of both systems in one scheme, i.e. planning activity in WCDMA time format and GSM activity in GSM timeformat each with a separate low layer software and hardware support. The only common planning needed is to ensure that the GSM RAT device and the WCDMA RAT device do not use the same GSM idle gaps for measurements. The cell measurements of the two access technologies are otherwise not dependent on each other. Moreover, the WCDMA RAT device does not require access to several succeeding GSM idle gaps. Therefore, it is preferred that the WCDMA RAT device and the GSM RAT device plan their own activities independently.

Summary of the invention

It is an object of the present invention to provide a method for measurement event synchronisation of terminals with multiple radio access technologies.

This object is achieved by a method for measurement event synchronisation of a portable radio communication apparatus providing multiple radio access technologies, characterized by the steps of identifying an idle gap between transceiver activities of a first radio access technology device, and sending an execute signal to a second radio access technology device for initiating inter-radio access technology measurements of said second radio access technology device to be performed during said gap.

A more specific object of the invention is to provide an apparatus for working said method.

This specific object of the invention is achieved by a portable radio communication apparatus providing multiple radio access technologies, comprising a first radio access technology device and a second radio access technology device, wherein the first and second radio access technology devices are operatively interconnected. The portable radio communication apparatus further comprises a controller adapted to identify an idle gap between transceiver activities of the first radio access technology device, and send an execute signal to the second radio access technology device for initiating inter-radio access technology measurements of the second radio access technology device to be performed during the gap.

An advantage of the method and apparatus according to the invention is that a low complexity solution is provided with low real time requirements, for the problem of event synchronisation of GSM and WCDMA radio access technologies. Moreover, the method allows an implementation where both RAT devices plan their activities independently of each

other. Thereby, the development of platforms for GSM and WCDMA can be performed independently of each other. Another advantage is that the method does not require synchronisation of the clocks in the GSM and the WCDMA RAT devices.

Brief Description of the Drawings

In order to explain the invention in more detail and the advantages and features of the invention a preferred embodiment will be described in detail below, reference being made to the accompanying drawings, in which

FIG 1A is a schematic block diagram of a first embodiment of a dual-radio access technology terminal according to the invention,

FIG 1B is a schematic block diagram of the dual-radio access technology terminal in FIG 1A with circuits/ components in further detail,

FIG 1C is a schematic block diagram of a second embodiment of a dual-radio access technology terminal according to the invention,

FIG 2 is a schematic view of the different levels of communication for measurement event synchronisation between first and second radio access technology devices of the dual-radio access terminal in FIG 1A,

FIG 3 is a schematic view of a cellular mobile telephone network, and

FIG 4A and FIG 4B illustrate flowcharts of two alternative embodiments of the method according to the invention.

Detailed Description of the Invention

An embodiment of a multiple radio access technology (RAT) terminal utilising common radio resources for size and RF (radio frequency) performance reasons and having means for measurement event synchronisation according to the invention is shown in FIG 1A. In this embodiment, the

11/04/2003

11:28

STROM & GULLIKSSON - 0012148554300

020410 JA \CURRENT\100\13674 ERICSSON\180_1000\1800_1000\1800_1000\Event\180_1000-FINAL.doc
b.

terminal has two different radio access technology devices and is therefore referred to as a dual RAT terminal or communication apparatus 100. The term terminal or communication apparatus includes portable radio communication equipment. The term portable radio communication equipment includes all equipment such as mobile telephones, pagers, communicators, i.e electronic organizers, smartphones or the like.

The communication apparatus 100 includes but is not limited to a first radio access technology device 101 based on WCDMA (Wideband Code Division Multiple Access) and a second radio access technology device 102 based on GSM (Global System for Mobile Communication). The first radio access technology device 101 has a WCDMA radio transmitter/receiver or transceiver 103, which is adapted to establish and maintain WCDMA connections with other communication equipment via a WCDMA base station, described later. The transceiver 103 has a transmitter 104 and a receiver 105, connected to an antenna 106 via an antenna switch 107. The second radio access technology device 102 has a GSM radio transmitter/receiver or transceiver 108, which is adapted to establish and maintain GSM connections with other communication equipment via a GSM base station, described later. The transceiver 108 has a transmitter 109 and a receiver 110, connected to the common antenna 106 via said antenna switch 107.

The WCDMA transceiver 103 is connected to a controller 111. The controller 111 may be implemented in several different ways, such as in the form of a programmable microprocessor (CPU), an Application-Specific Integrated Circuit (ASIC), or any other electronic logic device that fulfils the functional requirements set out below. Portions of the controller 111 may also be implemented in the form of software program instructions, which are stored in an electronic memory 112 and may be

read and executed by the controller 111. The memory 112 is coupled to the controller 111 and may be implemented e.g. as a RAM memory, ROM memory, EEPROM memory, flash memory, etc.

5 Similarly, the GSM transceiver 108 is connected to a controller 113. This controller 113 can also be implemented in several different ways, such as in the form of a programmable microprocessor (CPU), an Application-Specific Integrated Circuit (ASIC), or any other electronic logic device that fulfils the functional requirements set out below. Portions of the controller 113 may also be implemented in the form of software program instructions, which are stored in an electronic memory 114 and may be read and executed by the controller 113. The memory 114 is coupled to the controller 113 and may be implemented e.g. as a RAM memory, ROM memory, EEPROM memory, flash memory, etc.

10

15

In this

In this embodiment of the invention the communications apparatus 100 is a mobile telephone that can be used for but is not limited to conventional mobile communications. Additionally it can be used for wideband digital radio communications of advanced Mobile Internet services; multimedia, video and/or other capacity-demanding applications with the WCDMA and GSM mobile telecommunications networks, which preferably operate at about 2 GHz and 900, 1800 and/or 1900 MHz, respectively.

The dual radio access technology communication apparatus 100 comprises additional circuits and/or components 115 to make the apparatus operate properly. With reference to FIG 1B, these circuits and/or components 115 include but are not limited to an additional controller or central processing unit (CPU) 116 provided for interpretation and execution of program instructions for communication with the first and second radio access technology devices 101, 102 and for controlling the

operations of other components and blocks in the apparatus, such as a data and program memory 117, a keypad 118, an LCD driver 119 for driving an LCD display 120, a microphone 121, which is adapted to receive sound waves from for example a human voice of a user of the phone for conversion into an analog signal. The microphone is connected to a first analog-to-digital (A/D) converter 122, which converts the analog signal from the microphone to a digital signal before input to a digital signal processor 123 (DSP). The DSP 123 processes the digital signal from the A/D converter 122, and data from the keypad 118 and the display are adapted for further transmission via the first radio access technology device 101 based on WCDMA or the second radio access technology device 102 based on GSM. Signals received by the first and second radio access technology devices 101 and 102 are transferred to a digital-to-analog (D/A) converter 124, which converts the digital signal to an analog signal for reproduction by a loudspeaker 125 connected to the D/A converter 124. Other data such as picture, text, or video data, etc that are received are forwarded to the display or other accessories of the apparatus, 100.

FIG 2 is an illustrative view of the different layers of hardware and software of the apparatus, 100 involved in the method of measurement event synchronisation, described later, between the GSM RAT device 102 and the WCDMA RAT device 101. The two blocks to the left in FIG 2 represent the GSM RAT device 102 and the two blocks to the right in FIG 2 represent the WCDMA RAT device 101. A GSM physical layer block 201 illustrates the physical or hardware layer for communication and access of the physical medium between the GSM RAT device 102 and the WCDMA RAT device 101. A corresponding physical layer block of the WCDMA RAT device is the WCDMA physical layer block 202. On the next level there is a management physical layer or radio resource

block (RR) 203, which is responsible for establishing, maintaining and terminating connections with the WCDMA RAT device 101 and communicates with the corresponding radio resource controlled block (RRC) 204 of the WCDMA RAT device.

FIG 3 shows an embodiment of a part of a dual RAT system including a cellular mobile telephone network for cellular telephone service. Cellular telephone service involves the subdivision of a service area into a number of smaller cells. Each cell requires a base station (BS) 301, 301' - a GSM base station or WCDMA base station - and an antenna 302, 302'. One BS can support several cells. A GSM base station and a WCDMA base station may be located separately or at the same location. In this embodiment of the network the base station 301 is a GSM base station and the base station 301' is a WCDMA base station. The base stations 301, 301' perform the switching function as well as the tracking of mobile telephone users. A gateway mobile services switching center (GMSC) 304 or only mobile services switching center (MSC) 305 provides the network with specific data about individual mobile phones 303 or dual RAT terminals 100 and operates as an interface to a public switched network (PSTN) 306.

In this dual RAT system, the GSM radio access technology device 102 and the WCDMA radio access technology device 101 work together in a quasi parallel manner, wherein the first RAT device will be active and the second RAT device will be non-active (or passive). In this embodiment of the invention, the GSM RAT device is the active and the WCDMA RAT device operates as a slave-system to the GSM RAT device. The non-active radio access device, i.e. the WCDMA RAT device 101 in this embodiment, shall monitor its neighbouring base stations. In this example embodiment the dual RAT terminal 100 only has one close neighbouring WCDMA base station 301'. Although only one

11/04/2003

11:28

STROM & GULLIKSSON -> 0012148554300

50452005-0
NR.938 001

030410 JA \CURRENT\DR\1674 Ericsson\1180_Measurement_Event\1674-180-FINAL.doc
10

neighbouring base station is present in this embodiment,
this is for illustration purposes only. In other
alternative embodiments of the cellular communication
system in FIG 3 a number of neighbouring base stations,
5 both GSM and WCDMA base stations, can be included to be
monitored by the dual RAT terminal 100 within the scope of
the invention. When monitoring the neighbouring base
station, the non-active RAT device 101 will get time
resources from the active RAT device 102 to perform inter-
10 RAT measurements. The operation of the method for
measurement event synchronisation of the dual RAT terminal
according to the invention depends on the current state of
the active GSM RAT device 102. The GSM RAT device can
operate in a dedicated/packet transfer state, called a
15 dedicated mode, or in idle/packet idle state, called an
idle mode. The dual RAT terminal 100 is also adapted to
handle exceptions in the synchronisation method in paging
and RACH situations.

When the GSM RAT device 102 is in the idle state, the
20 WCDMA RAT device 101 will get several complete WCDMA frames
within which it can perform its synchronisation and
measurements. This case does however not require any
additional features than provided by normal WCDMA
operation.

25 However, when the GSM RAT device is in dedicated
mode, it will allocate a number of idle frames for WCDMA
operations.

A first embodiment of the method according to the
invention is illustrated by the flowchart in FIG 4. In a
30 first step 401, the RR 203 plans the schedule for the
periods when common radio resources can be used by the
passive WCDMA RAT device 101. In dedicated mode, the
terminal 100 can measure during so-called idle frames that
occur once every 51 multiframe (120 milliseconds) and every
35 26 multiframe for TCH/F and TCH/H. For TCH/H and packet

dedicated full rate and halfrate there might be more than 1
idle frame per 26 resp 52 multiframe and for the various
SDCCH subchannels the idle frames are based on a 51
multiframe. These idle frames are, however, used for both
S GSM measurements and WCDMA inter-RAT measurements. Thus,
the available idle frames must be distributed and scheduled
between the WCDMA RAT device 101 and the GSM RAT device
102. It is, however, difficult to schedule the usage of GSM
idle frames for GSM internal measurements in advance, i.e.
10 a comparably long time ahead. Hence, it is difficult to
schedule which idle frames that are available for the WCDMA
RAT device to perform measurements.

The RR 203 plans the schedule by identifying an idle
frame or gap between transceiver activities that can be
15 used by the WCDMA RAT device 101 for measurements. The next
step after identification of a suitable idle gap, a
hardware execute signal is sent by the GSM physical layer
201 to the WCDMA physical layer 202, either at the
beginning of said gap or at a specified period before said
20 gap, in step 402. In particular cases, the length of the
gap is required by the WCDMA RAT device 101. In these
cases, the execute signal includes information about the
length of the measurement gap. The WCDMA RAT device 101 and
its controller 111 takes over the common radio resources,
25 i.e at least the switch 107 and the antenna 106, during the
gap and performs its measurements on the neighbouring base
stations, the base station 301 in this example, in step
403.

Provided that the gap has a minimum required length,
30 any WCDMA base station can be identified in any measurement
gap, independent of the specific placement of the gap in
time. Since the WCDMA system is independent of the timings
of the available measurement gaps, the WCDMA RAT device 101
can decide which base station, i.e. cell, to measure on
35 during an upcoming gap in advance, and carry out the

measurement with very short delay at reception of the
execute signal from the GSM RAT device 102.

When the gap is over, the GSM RAT device 102 and its
controller 113 resumes its normal operation in step 404,
S preferably without notification from the WCDMA RAT device
101.

Both the WCDMA transceiver 103 and the GSM
transceiver 108 have radio frequency synthesisers that need
to be running and stable when the respective technology is
either receiving or transmitting, i.e. also during
10 measurement operations. The start-up characteristics of the
synthesisers have influence on the timing to an extent
depending on the respective start-up time for the
synthesisers. Further, the WCDMA receiver 105 needs to tune
15 in every time the WCDMA RAT device 101 is to perform
measurements. This tune-in-time has the same influence on
the available measurement time as the WCDMA synthesiser
start-up time. Due to this start-up time and tune-in-time,
the WCDMA RAT device 101 may need to be prepared before the
20 actual execute signal is received and to get enough time of
the total length of the gap to perform the measurements.

An alternative embodiment of the method of the
invention, including the step of sending a "prepare" signal
to the passive WCDMA RAT device 101, is illustrated by an
25 extended flowchart in FIG 4B. The GSM RAT device 102 plans
the schedule in step 401 and sends a prepare signal in step
402a to wake up the passive WCDMA RAT device 101. In this
case, the prepare signal also includes the information of
the length of the upcoming gap. In a next step 402b, the
30 WCDMA RAT device 101 starts up and leaves an occasional low
power consuming state to perform necessary preparations for
receiving an execute signal sent from the GSM RAT device
102 within a short delay in step 402c. The measurement is
then performed by the WCDMA RAT device 101 in step 403 and

the GSM RAT device 102 resumes its operation after the measurement in step 404.

When the GSM RAT device 102 is in one of the exception states, the occasions for the non-active WCDMA RAT device 101 are so short that there is no need to interrupt an ongoing occasion. This applies, however, only to neighbouring cell measurements, but not to measurements needed for a PLMN search. Hence, the handling of exceptions is performed by normal scheduling of the frame based synchronisation interrupts. In idle/packet idle state, the GSM RAT device 102 listens to paging, i.e. base stations call their individual terminals in their respective cells, measure the receiver level, identify new neighbouring base stations and reconfirm already identified neighbours. The periods between these activities constitute the source for the schedule.

Although embodiments of the method and apparatus of the invention has been illustrated in the accompanying drawings and described in the foregoing detailed description, the disclosure is illustrative only and changes, modifications and substitutions may be made without departing from the scope of the invention as set forth and defined by the following claims.

In an alternative embodiment of the invention the WCDMA RAT device is active and the GSM RAT device is passive. However, the gaps have to be long enough for GSM measurement planning. This is possible when the WCDMA is in idle mode. In this case the measurement gaps will be of different duration depending on the DRX cycle giving GSM enough time for its planning.

11/04/2003

11:28

STROM & GULLIKSSON → 0012148554300

11/04/2003 11:28 NR.938 -001

D:\0410 JA \CURRENT\2003\1074 Ericsson\PI\200_Measurement_Event\1074-100-FINAL.doc
14

5 In an alternative embodiment of the dual radio access technology communication apparatus 100 the additional controller or central processing unit (CPU) 116 is adapted to control not only the "other components" 117-125 but also the first and second radio access technology devices 101, 102. Hence, no additional controllers 111 and 113 are required in this alternative embodiment.

10 In still another embodiment of the dual radio access technology communication apparatus 100, the first and second radio access technology devices 101, 102 are connected to separate antennas 106' and 106", as shown in FIG 1C.

15 Other alternative embodiments provide measurement event synchronisation according to the invention in some cases between CDMA2000 and WCDMA or GSM within the scope of the invention.

ABSTRACT

A method and apparatus for measurement event
synchronisation of a portable radio communication apparatus
(100) providing multiple radio access technologies, wherein
5 an idle gap is identified between transceiver activities of
a first radio access technology device (102) (401), and an
execute signal is sent to a second radio access technology
device (101) for initiating inter radio access technology
10 measurements of the second radio access technology device
(101), to be performed during the gap (402, 402c, 403).

To be published with FIG 4A.

1/6

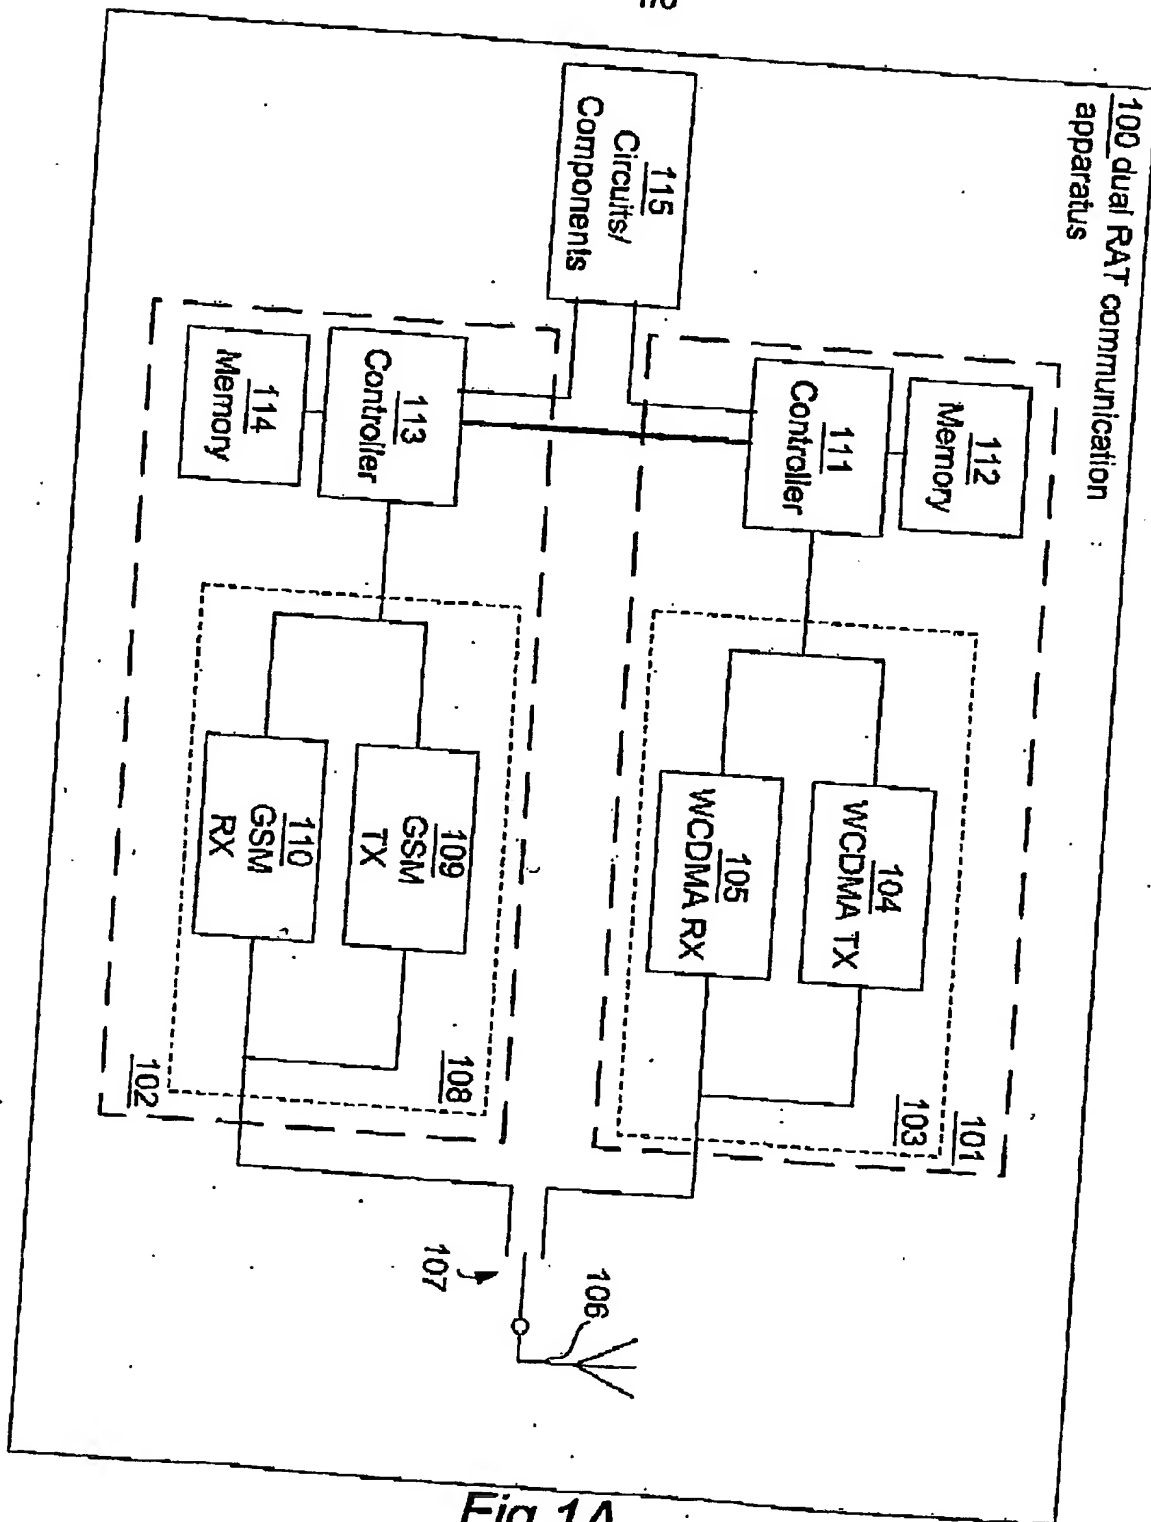


Fig 1A

2/6

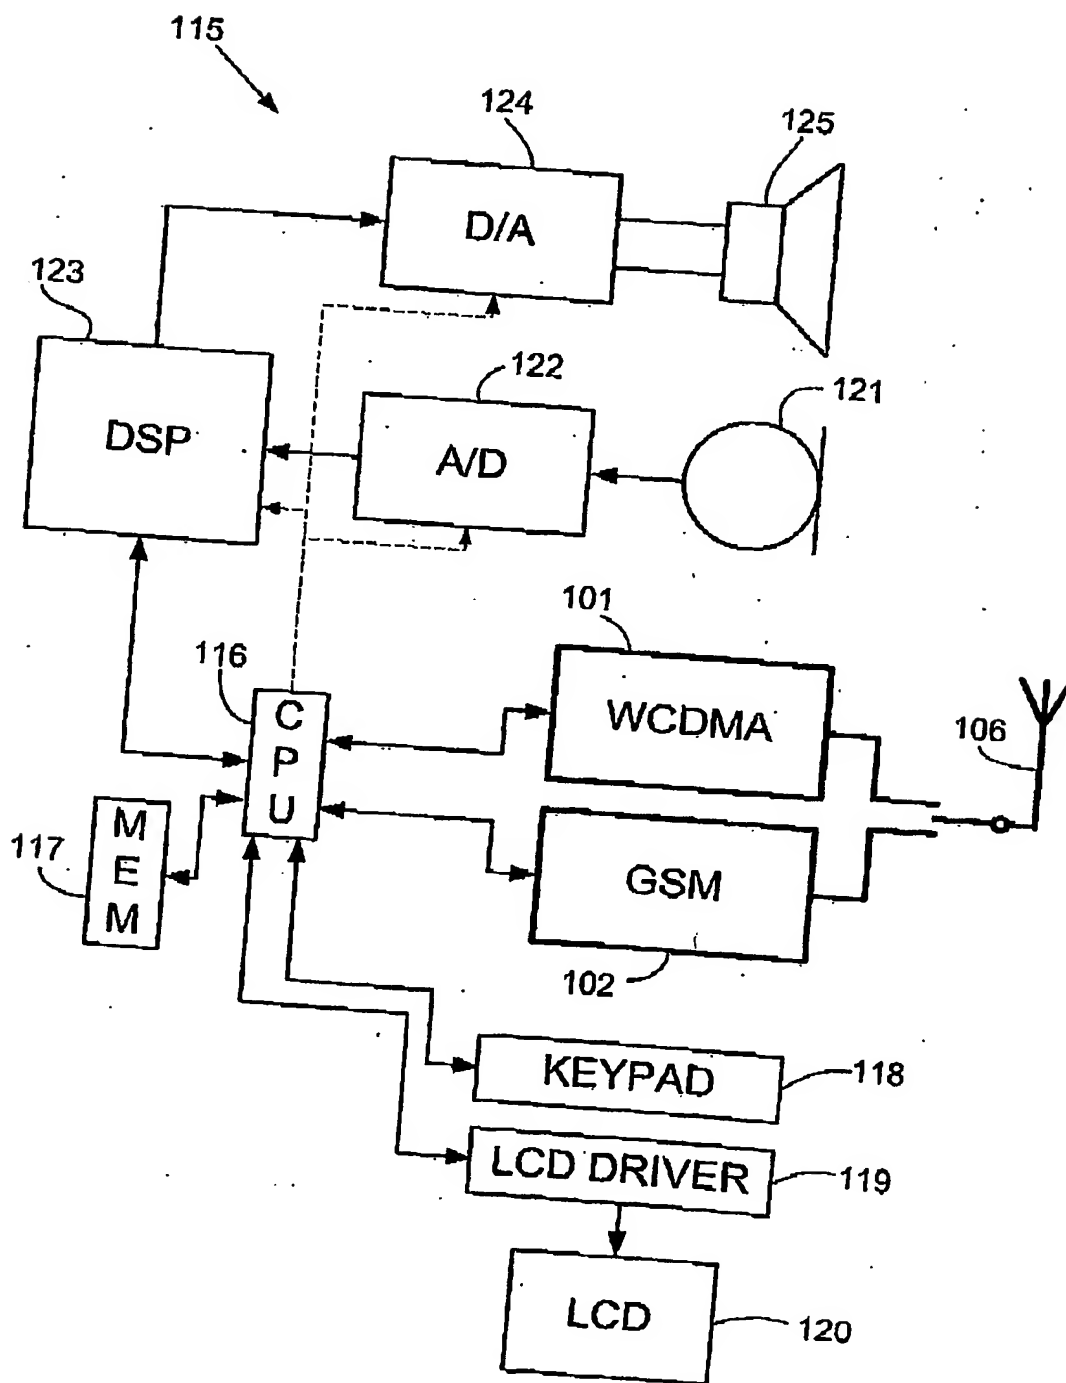


FIG. 1B

3/6

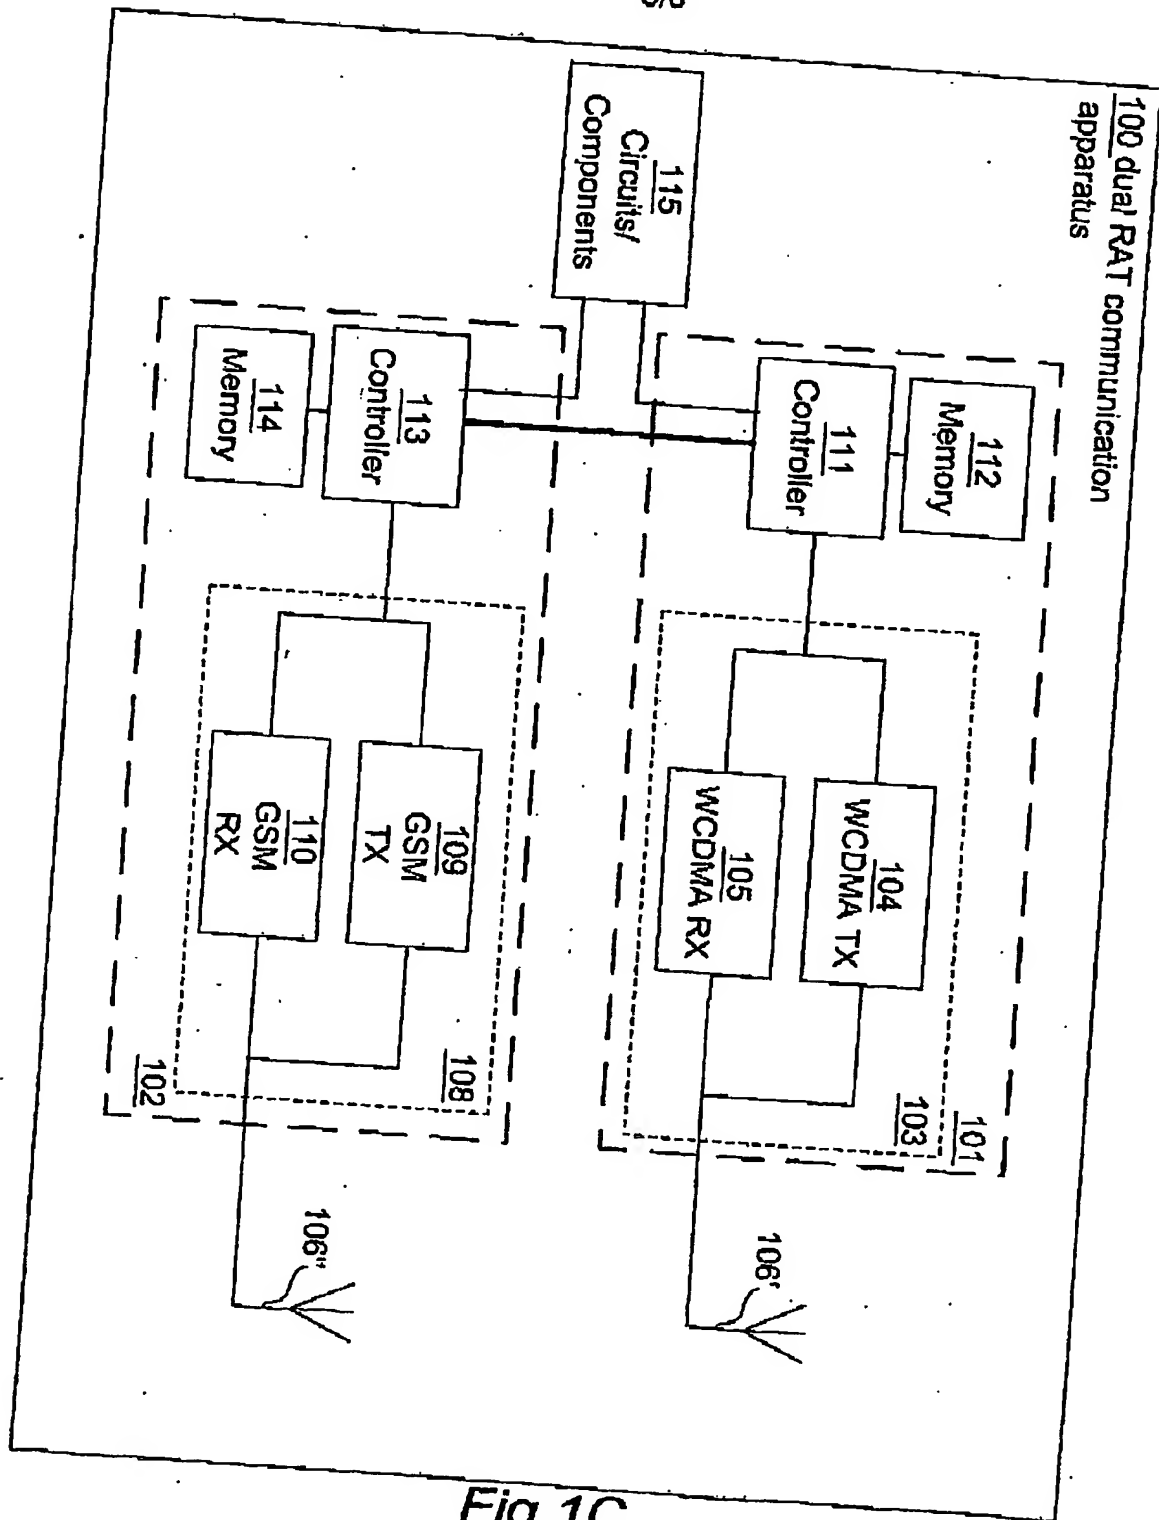
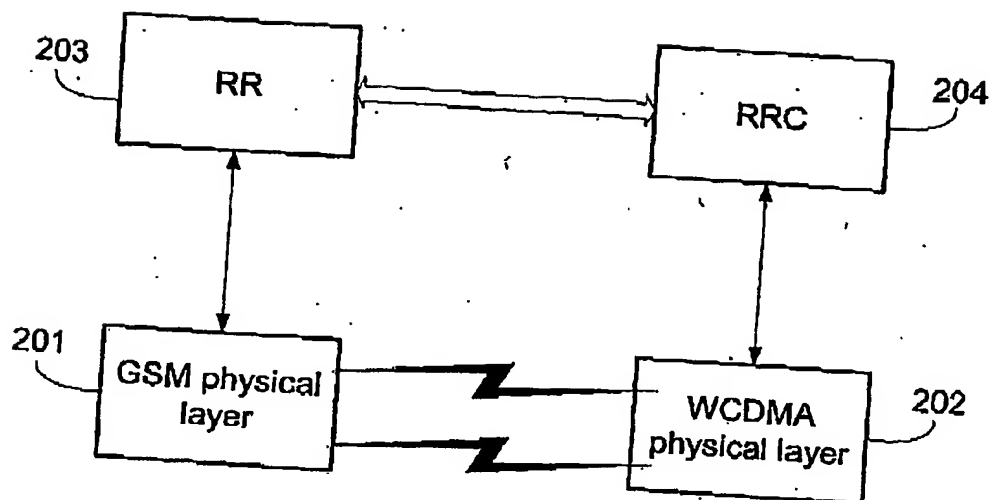
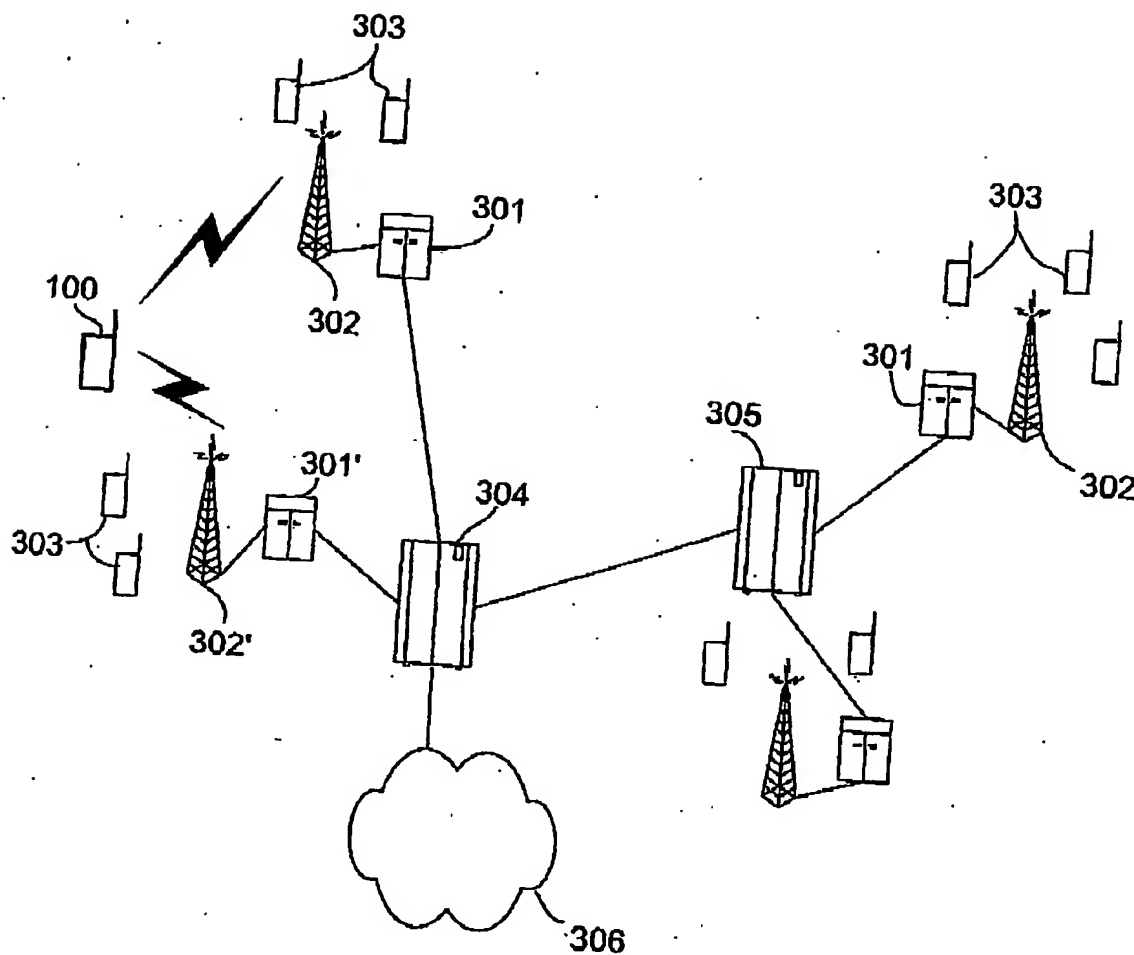


Fig 1C

4/6

**FIG. 2**

5/6

**FIG. 3**

6/6

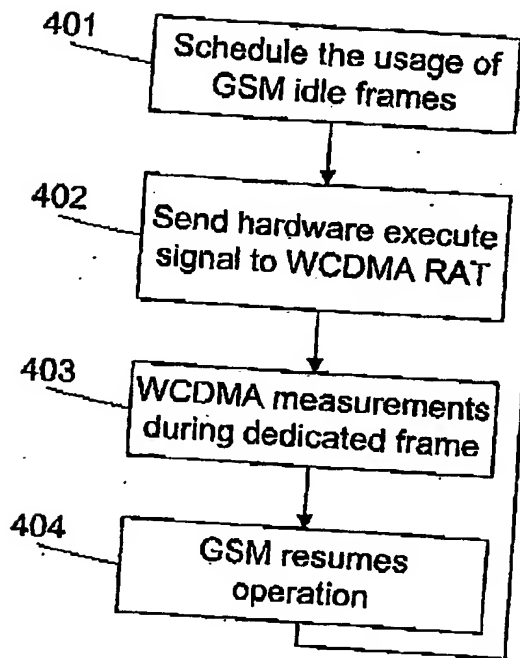


FIG. 4A

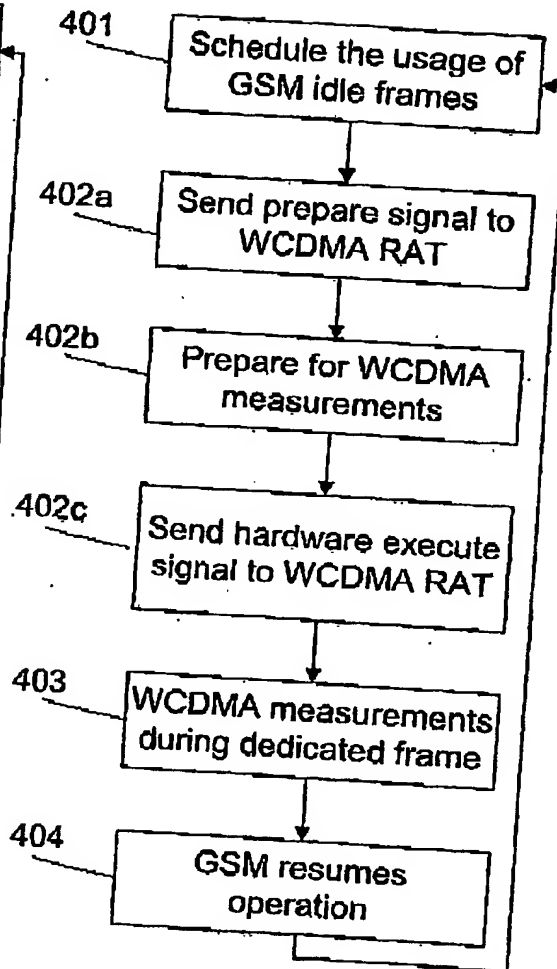


FIG. 4B

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☒ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.